

GEORGE SMITH & CO.  
SUN FOUNDRY  
GLASGOW.





**ILLUSTRATED LIST**  
OF  
**CAST-IRON**  
**PLAIN AND ORNAMENTAL FOUNTAINS,**  
POST OFFICE PILLARS;  
ROUND AND SQUARE RAIN-WATER PIPES;  
ALSO,  
PLAIN AND ORNAMENTAL GUTTERS AND ROOF RIDGING,  
KITCHEN SINKS AND SINK-TRAPS, WATER CLOSET PUMPS, &c.;  
BENCH AND DESK STANDARDS;  
AND ALL KINDS OF  
*Cast-Iron Fittings for Plumber and Architectural Purposes.*  
MANUFACTURED BY  
**GEORGE SMITH AND COMPANY,**  
IRON-FOUNDERS,  
**SUN FOUNDRY, 64 PORT-DUNDAS ROAD,**  
**GLASGOW.**



[BLANK PAGE]



CCA

This  
contrived  
concussion  
Pr



# ORNAMENTAL FOUNTAIN.

7



No. 1.—STREET DRINKING FOUNTAIN

This Fountain is provided with a Drinking-Tap and Ladles, the Tap being of a very durable construction, and contrived to close of itself on removing the hand, so as to prevent waste, whilst it closes gradually, and produces no concussion in the pipes, and is adapted for casting into stone. Height, 3 feet 6 inches.

Price, with Basin, L.2 8s.; without Basin, L.2. Price, with Basin Galvanized, L.3; without Basin, L.2 12.



[BLANK PAGE]



CCA



This  
of the G  
in the v  
each with  
the ordin  
water fr  
outlet bei



# ORNAMENTAL FOUNTAIN.

2



No. 2.—STREET DRINKING FOUNTAIN.

This is the Fountain adopted at Glasgow, having been selected at a Public Competition by the Commissioners of the Glasgow Corporation Water Works. Drinking Fountains made in Cast Iron to this Design have been erected in the various Wards of the City, and are now in full operation, giving general satisfaction. They are provided each with one Drinking-Tap, of a simple and durable kind, and with Two Galvanized Iron Ladles. A Cistern, with the ordinary ball-cock, may be arranged within the pillar. A Basin is fitted beneath the Tap to receive the waste water from it, and from this Basin the Water passes down into a shallow Trough at the base for Dogs,—an overflow outlet being provided to prevent flooding of the pavement.

Price, L.5 11s. Price, with Pillar Galvanized, L.8.



[BLANK PAGE]



CCA





**No. 3.—ORNAMENTAL FOUNTAIN,**

**FOR PUBLIC PARKS, PRIVATE GARDENS, RAILWAY STATIONS, STREETS, &c.**

The Water falls over Eight different outlets in Basins, although not shown above.

Height, 10 feet; Diameter of Trough, 7 feet. Price, L.25. Price, with Stalk and Upper Basins Galvanized, L.30.



STAT 8503

[BLANK PAGE]



CCA

This Fou  
a wall, and i  
ing the wall.  
and has an o  
on the street.



# ORNAMENTAL FOUNTAIN.

4



**No. 4.—DRINKING FOUNTAIN.**

This Fountain is provided with a Drinking-Tap of the same construction as No. 1, and is adapted for fixing against a wall; and is also suitable for Railway Stations, Schools, Factories, &c. Its construction prevents damp from reaching the wall. The supply pipe is led up through the column, and the basin in front serves to keep the pavement dry, and has an outlet in the bottom for supplying the Dog Trough below, which has an overflow outlet to prevent flooding on the street.

Height, 4 feet 6 inches  $\times$  18 inches. Price, L.3. Price, Galvanized, L.3 14s.


[BLANK PAGE]



CCA

This Fo  
a wall; and  
ing the wall  
and has an  
on the street



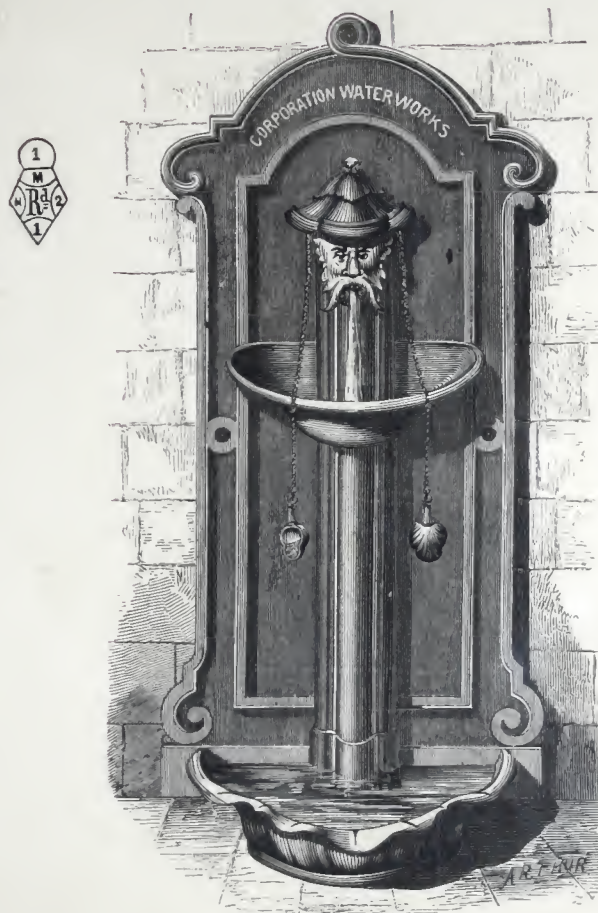

No. 5.—DRINKING FOUNTAIN.

This Fountain is provided with a Drinking-Tap of the same construction as No. 1, and is adapted for fixing against a wall; and is also suitable for Railway Stations, Schools, Factories, &c. Its construction prevents damp from reaching the wall. The supply pipe is led up through the column, and the basin in front serves to keep the pavement dry, and has an outlet in the bottom for supplying the Dog Trough below, which has an overflow outlet to prevent flooding on the street.

Height, 4 feet 6 inches  $\times$  18 inches. Price, L.3. Price, Galvanized, L.3 14s.

[BLANK PAGE]



CCA

This F  
a wall, and  
the wall.  
and has an  
ing on the





No. 6.—DRINKING FOUNTAIN.

This Fountain is provided with a Drinking-Tap of the same construction as No. 1, and is adapted for fixing against a wall, and is also suitable for Railway Stations, Schools, Factories, &c. Its construction prevents damp from reaching the wall. The supply pipe is led up through the column, and the basin in front serves to keep the pavement dry, and has an outlet in the bottom for supplying the dog trough below, which has an overflow outlet to prevent flooding on the street.

Height, 5 feet  $\times$  18 inches. Price, L.3 10s. Price, Galvanized, L.4 4s.

MEATWOLF JATWEN

[BLANK PAGE]




CCA

In th  
serves as  
troughs to  
to preven  
being ren  
ball-cock  
supplied  
batted in



# ORNAMENTAL FOUNTAIN.

6

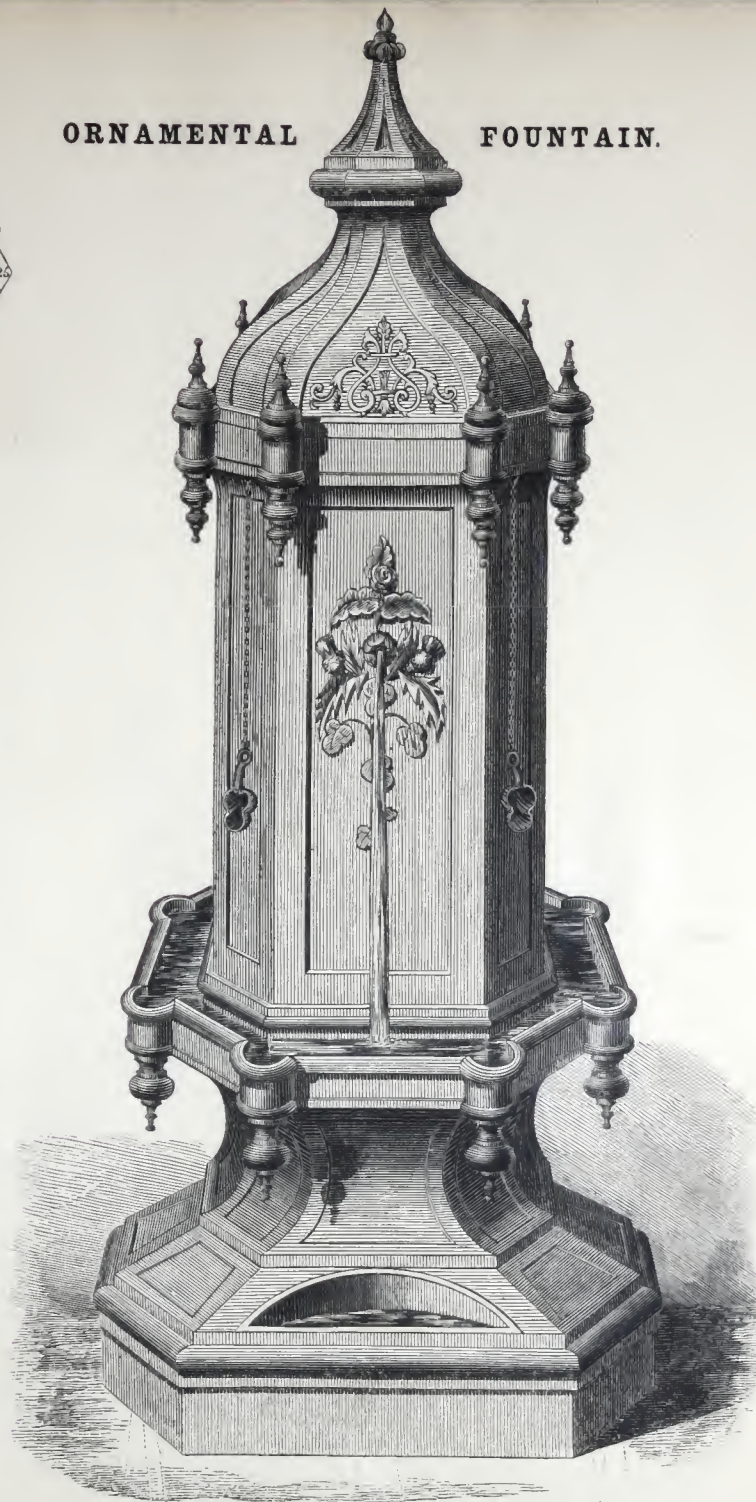

No. 7.—DRINKING FOUNTAIN.

In this design the body of the case is octagonal, and it comprises a kind of balcony passing entirely round it, which serves as a trough to receive the waste water from the tap, and for washing hands. At the base there are recessed troughs to contain water for Dogs, which are supplied from the balcony, and which are furnished with overflow outlets to prevent the water flooding the pavement. By placing the dog trough in a recess, the water in it is prevented from being rendered unclean by the feet of persons frequenting the Fountain, and can be supplied by a cistern and ordinary ball-cock. The balcony trough can be enlarged to form a suitable drinking trough for Horses, in which case it may be supplied by a separate tap. The Fountain is formed with dove-tails at bottom, by means of which it is to be firmly battened into a foundation stone.

Price, L.

. Price, Galvanized, L.

[BLANK PAGE]




CCA

This F  
water (one  
there are n



# ORNAMENTAL FOUNTAIN.

7

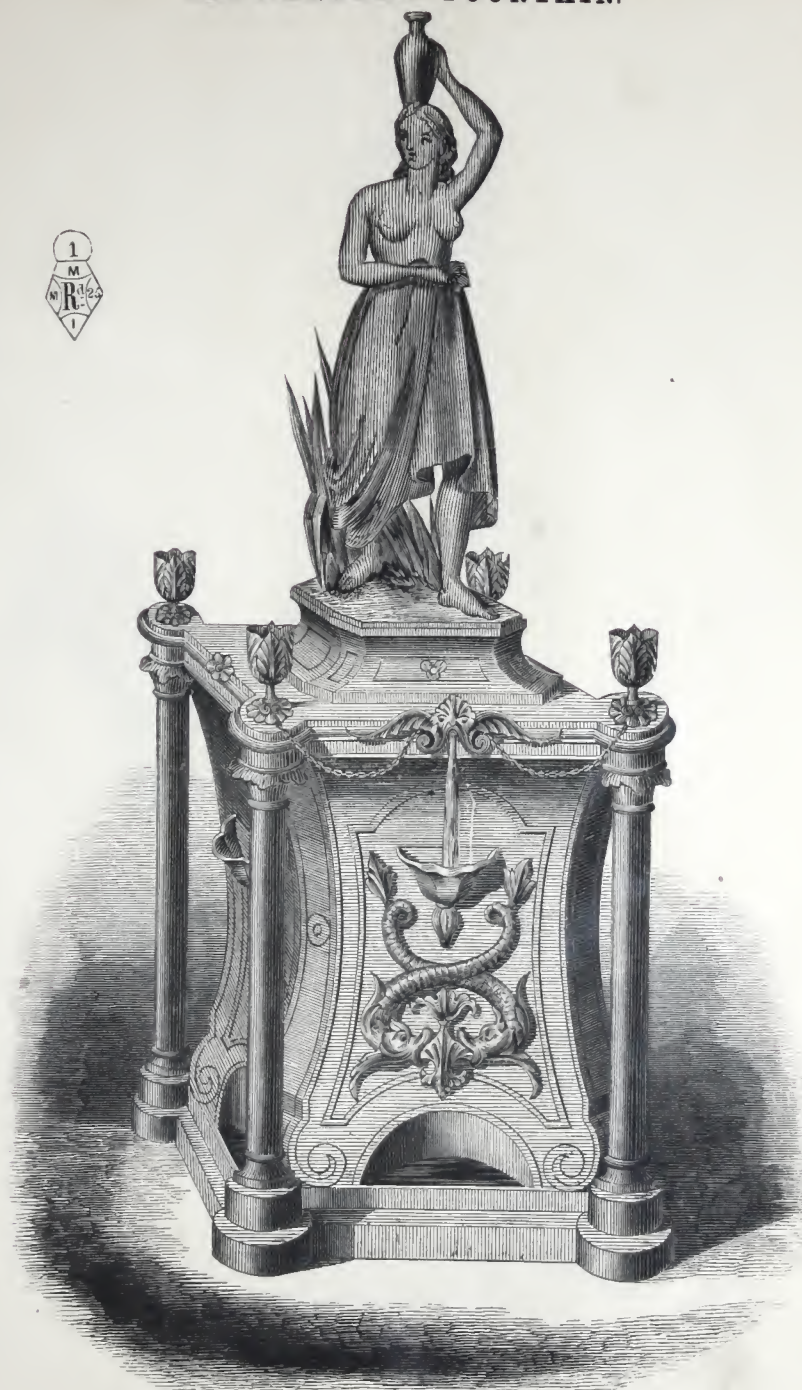

No. 8.—DRINKING FOUNTAIN.

This Fountain is specially designed to contain a Float-ball Cistern if required, and is provided with four streams of water (one or more of which may be adopted). Basins are provided for catching the waste water from each tap, and there are recessed troughs for Dogs at the base,—these troughs not projecting or causing obstruction on the pavement.

Price, L. . Price, Galvanized, L.

[BLANK PAGE]



CCA

In this Fount  
whilst an overflow



ORNAMENTAL CATTLE FOUNTAIN.

8



No. 9.—CATTLE FOUNTAIN,

FOR STREETS, CAB STANDS, COACH YARDS, RAILWAY STATIONS, &c.

In this Fountain a Trough for Cattle is always kept full by means of a concealed float-cock. The float-cock prevents waste, whilst an overflow outlet prevents flooding of the street, and a discharge plug affords a means of cleansing the Trough.

Height, 8 feet; Diameter of Trough, 4 feet; Depth, 2 feet 6 inches. Price, £

[BLANK PAGE]



CCA

This F  
extends rou  
prevents wa  
the trough.





ANTHUR Glasson

Price L.4 15s. Price, with Pillar Galvanized, L.5 10s.

[BLANK PAGE]



CCA





No. 11.—ORNAMENTAL DRINKING FOUNTAIN.

This Fountain is in every respect the same as No. 2, only of a smaller size. Height, 3 feet 6 inches; Size of Sole Plate, 30 × 30 inches.

Price, L.3 5s. Price, with Pillar Galvanized, L.3 15s.

[BLANK PAGE]



CCA



ORNAMENTAL

FOUNTAIN.

11



No. 12.—ORNAMENTAL FOUNTAIN,  
FOR PUBLIC PARKS, PRIVATE GARDENS, RAILWAY STATIONS, STREETS, &c.

Height, 10 feet; Diameter of Trough, 7 feet. Price, L.30. Price, Galvanized, L.

[BLANK PAGE]



CCA



# ORNAMENTAL FOUNTAIN.

12



## No. 13. — ORNAMENTAL DRINKING JET FOUNTAIN.

This Design is suitable for enclosing a Cistern by means of a float-cock. The Fountain may furnish one, two, three, or four streams for drinking, the waste from each being caught by a Basin, and conveyed down inside the Fountain-case to a trough at the base



for Dogs. The base of the Fountain-case is open through the arches, which imparts lightness to the Design. Provision is shown for a Jet at the top, the water from which is caught by a Shell, and conveyed down inside the case to the Dog Trough.

Price, L. . . . . Price, Galvanized, L.

[BLANK PAGE]



CCA

This Fou  
from a wall.  
Dogs. This





No. 14.—ORNAMENTAL DRINKING FOUNTAIN.

This Fountain is suitable for Railway Stations, Schools, Factories, &c., and is intended to project about eight inches from a wall. The waste water of the drinking stream is conveyed down through the Figure to a trough at the base for Dogs. This trough does not project beyond the bases of the columns.

Price, L. . Price, Galvanized, L.

[BLANK PAGE]



CCA

This co  
the supply  
down throu

This T  
feeding or w





No. 15.—DRINKING STAND AND CATTLE TROUGH.

This comprehends a Drinking Stand-Pipe, with a Trough for Cattle, and a float-cock enclosed at one end to regulate the supply of water. This float-cock is arranged so that there is always a slight overflow from the Cattle Trough, passing down through a passage in one of the legs to a trough at the base, suitable for Sheep, Dogs, &c.

This Trough is well suited for Cattle Markets, Road-sides, Cab Stands, Stable-Yards, Parks, &c.; is adapted for feeding or watering purposes, and can be made any length to order; can also be had with or without trough at bottom.

Price, L.8. Price, Galvanized, L.

[BLANK PAGE]



CCA






No. 16. — ORNAMENTAL LAMP AND DRINKING FOUNTAIN.

This is in every respect the same as No. 7, but has a Lamp-post added to the top, serving a twofold purpose.

Price, L.

. Price, Galvanized, L.



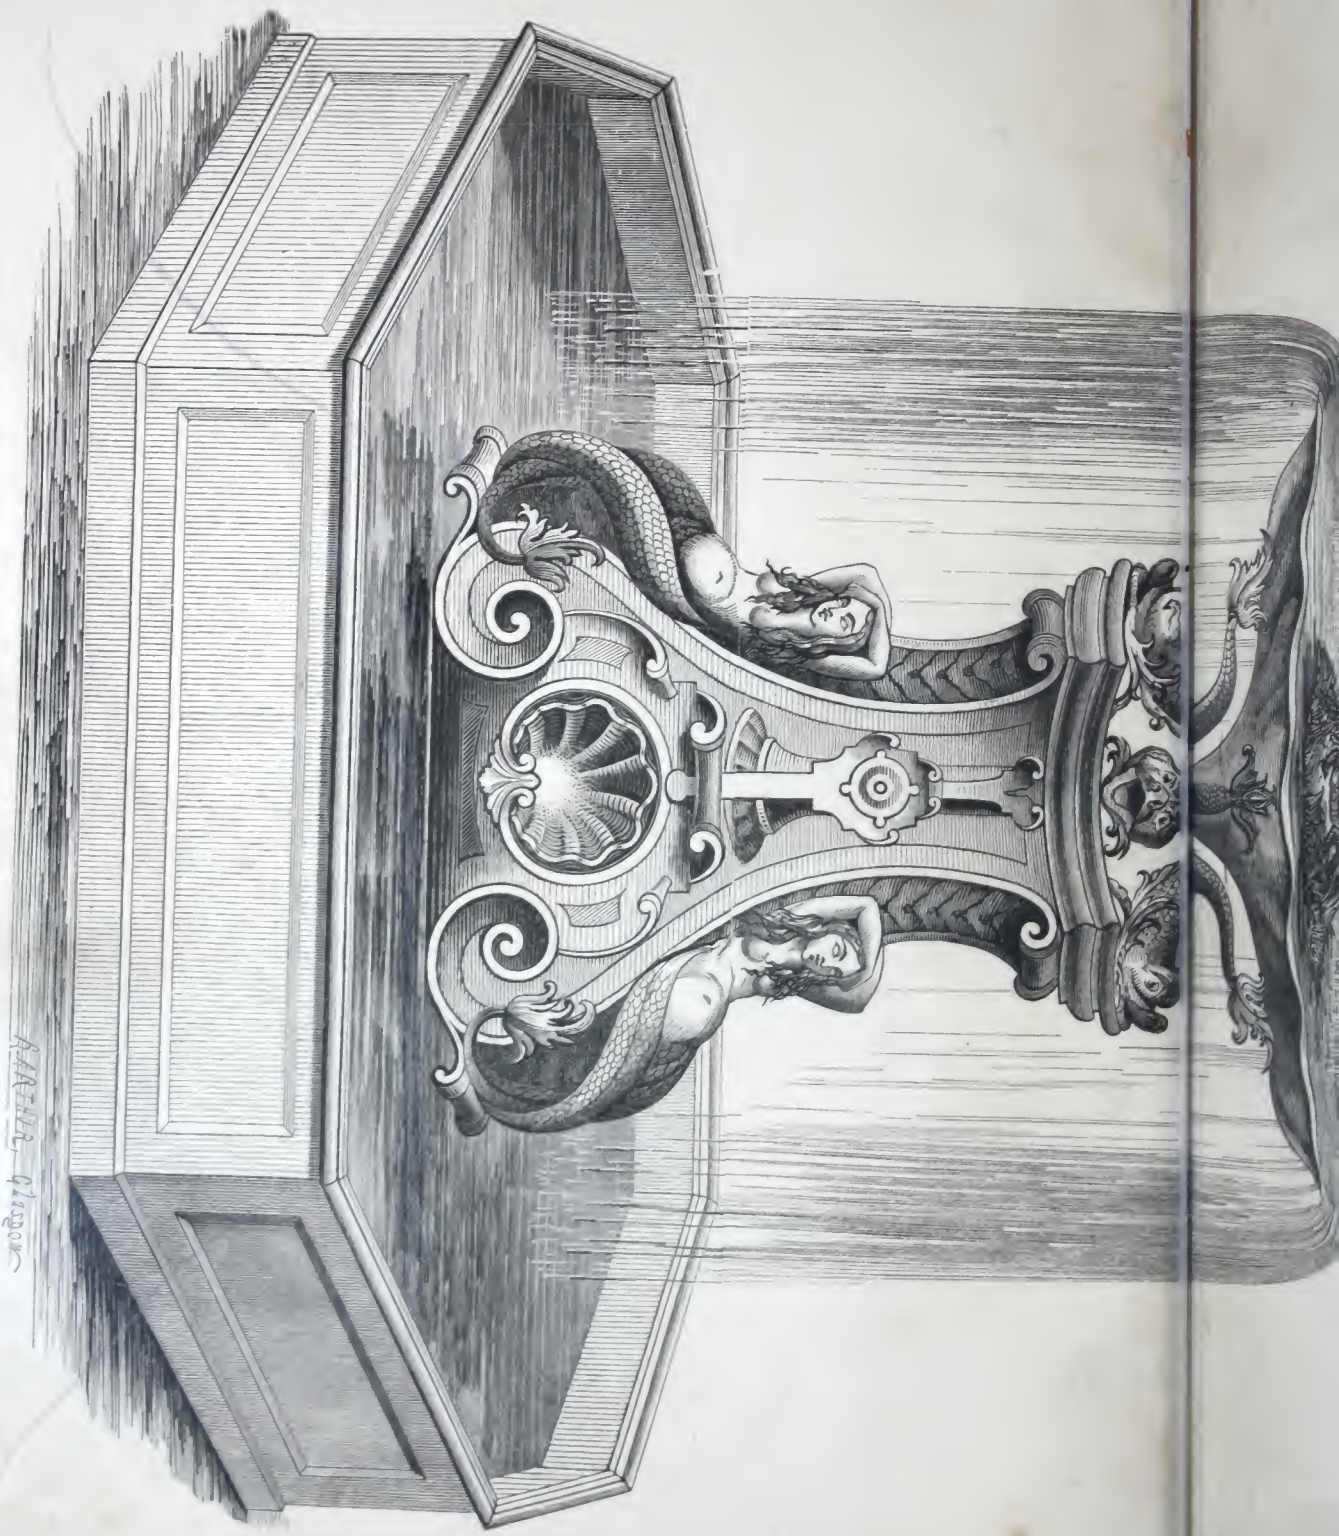


No. 17.—ORNAMENTAL CAST-IRON FOUNTAIN,

FOR SQUARES, GARDENS, PUBLIC PARKS, &c.

Height, 18 to 20 feet: Diameter of Trough, 12 feet. Can be Galvanized if wished.



I  
M  
R  
8  
3

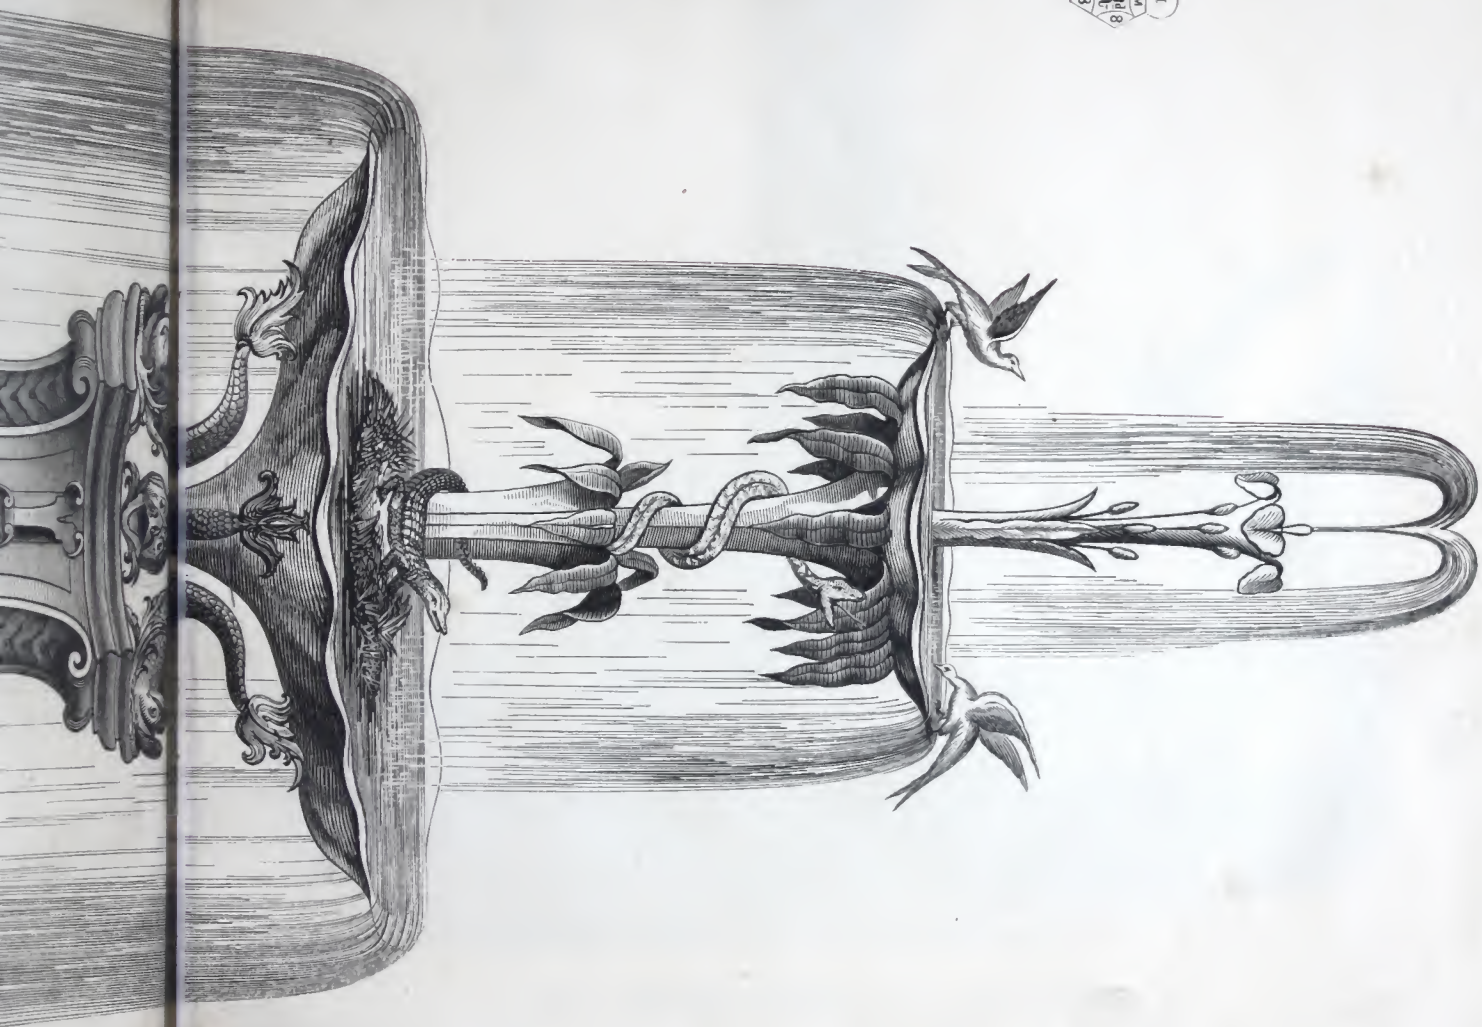

[BLANK PAGE]



CCA

This Four  
Cattle extend  
float-cock pre  
means for cle  
Height, 4





No. 18.—DRINKING FOUNTAIN AND CATTLE TROUGH.

SUITABLE FOR STREETS, CAR STANDS, ROAD SIDES, &c.

This Fountain is provided with a Drinking Tap and Ladder, same kind as No. 1. An oblong Trough for Cattle extends 2 feet on each side of the Pillar, and is always filled by means of a concealed float-cock. The float-cock prevents waste, whilst an overflow outlet prevents flooding of the pavement. A discharge plug affords means for cleansing the Trough.

Height, 4 ft. 6 in.; Length of Trough, 5 ft. × 18 in. deep. Price, L.

Price, with Pillar Galvanized, L.

[BLANK PAGE]



CCA



No. 1 PUMP—Plain.



No. 1 WELL CASE, for fixing to Wall Front—Plain.



2½, 3, 3½ inches.

3143-3143V 00

REPTING 10/10/10 10 10


[BLANK PAGE]



CCA



PUMPS, and WELL CASE for fixing to WALL FRONT.

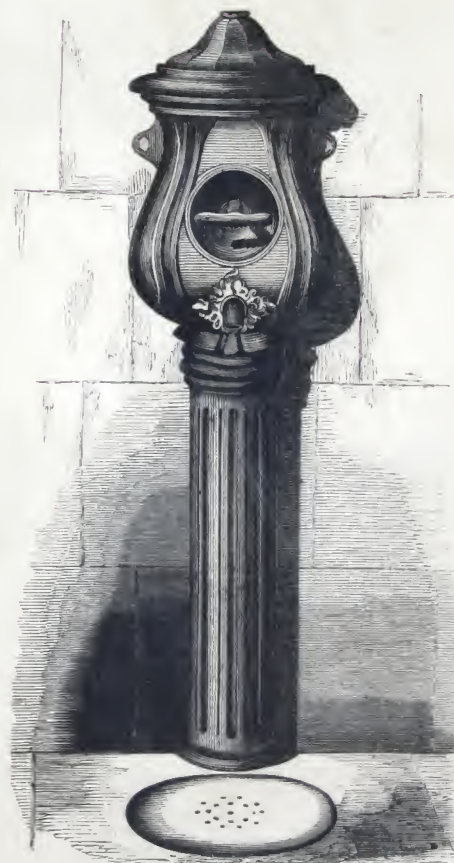

3, 3½ inches.

[BLANK PAGE]



CCA



# RAIN WATER AND STOVE PIPES.

18

PLAIN, or with No. 1 EARS, in 6 Feet Lengths.



2, 2½, 3, 3½, 4, 4½, 5, 6 inches.

SQUARE RAIN WATER PIPES, PLAIN, or with No. 1 EARS.



3 x 2½, 4 x 3, 5 x 3½ inches.

BRANCH PIECES.



2, 2½, 3, 3½, 4, 4½, 5, 6 inches.



3 x 2½, 4 x 3, 5 x 3½ inches.

SHOE.



2, 2½, 3, 3½, 4, 4½, 5, 6 inches.

UNION SOCKET.



2, 2½, 3, 3½, 4, 4½, 5, 6 inches.

SHOE.



3 x 2½, 4 x 3, 5 x 3½ inches.

[BLANK PAGE]



CCA



# PIPE CONNECTIONS.

19

ELBOW.



2, 2½, 3, 3½, 4, 4½, 5, 6 inches.

ELBOW, with Cleaning Door.





3, 3½, 4, 4½, 5, 6 inches.

ELBOW, Obtuse Angle.



2, 2½, 3, 3½, 4, 4½, 5, 6 inches.

OFFSETS for 3, 6, 9, 12 inch PLINTHS.

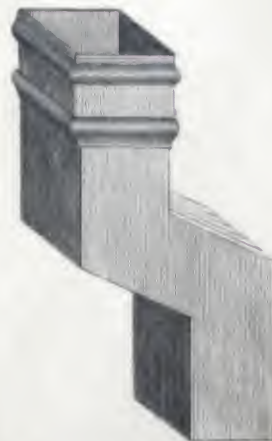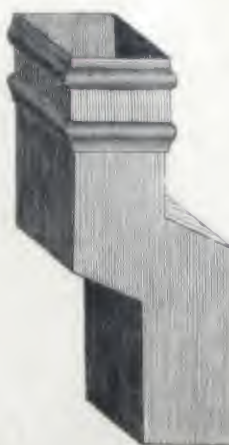

2, 2½, 3, 3½, 4, 4½, 5, 6 inches.

3 × 2½, 4 × 3, 5 × 3½ inches.

[BLANK PAGE]




CCA



# PIPE CONNECTIONS.


29

No. 1 HEAD.

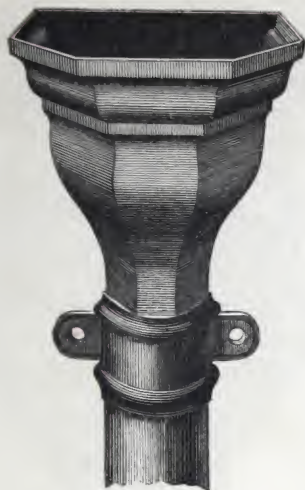


2, 2½, 3, 3½, 4, 4½, 5, 6 inches.

No. 2 HEAD.

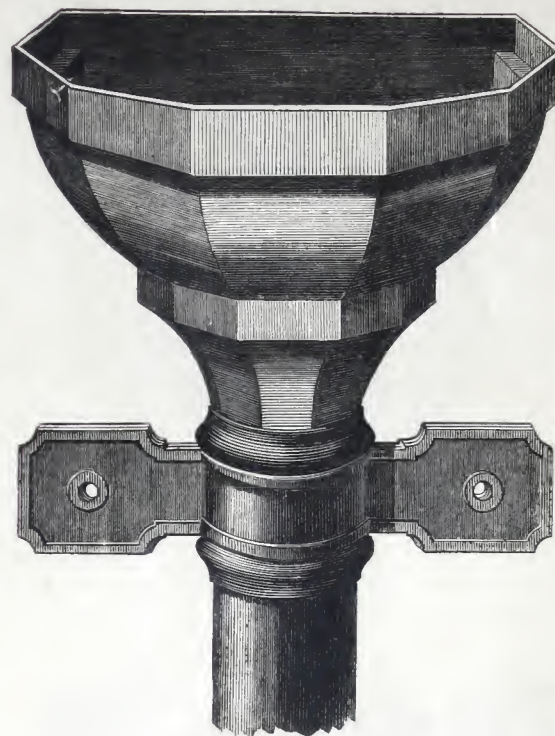


4 inches.

No. 6, EAR Loose.

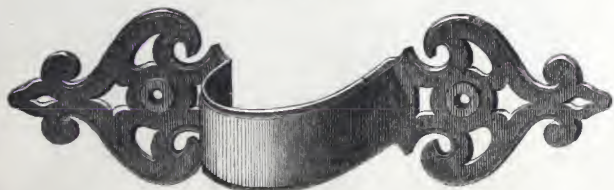


2½, 3, 3½, 4, 4½ inches.

No. 7, EAR Loose.

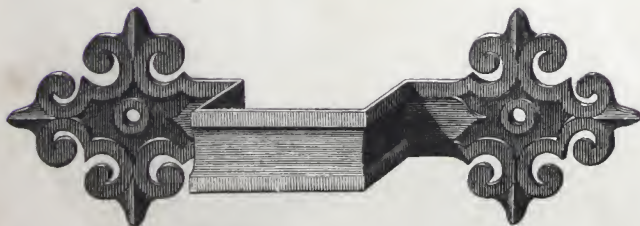

3 x 2½, 4 x 3, 5 x 3½ inches.

No. 2, EAR Loose.

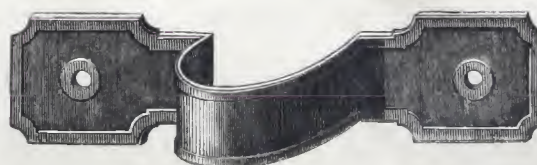

3, 3½, 4 inches.

REPRODUCTION

Page 104



[BLANK PAGE]



CCA





No. 3 HEADS, Round and Square, Plain or with Ornaments.



3½, 4 inches.



3 x 2½, 4 x 3, 5 x 3½ inches.

No. 3, EAR Loose.



3½, 4 inches.

No. 3, EAR Loose.



3 x 2½, 4 x 3, 5 x 3½ inches.

[BLANK PAGE]




CCA



# PIPE CONNECTIONS.


219

No. 4 HEAD.

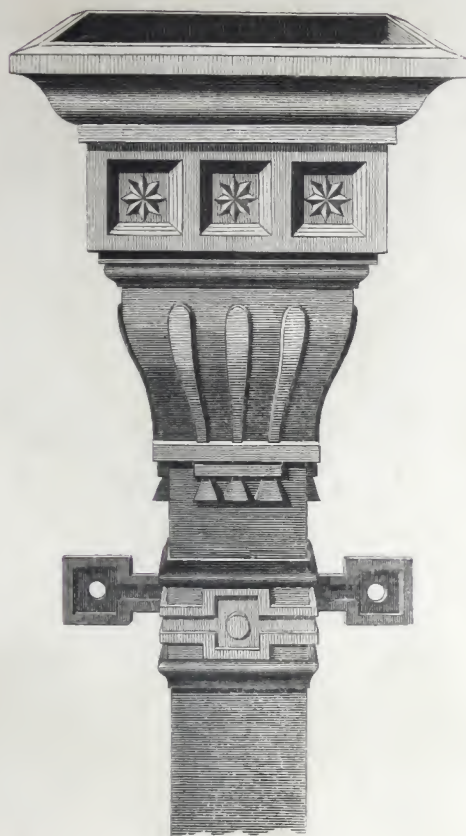

$3 \times 2\frac{1}{2}$ ,  $4 \times 3$  inches.

No. 5 HEAD.

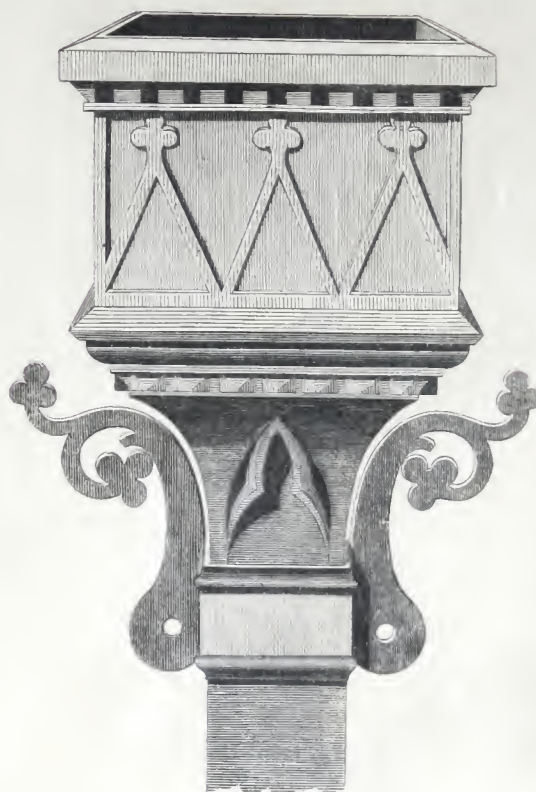

$3 \times 2\frac{1}{2}$ ,  $4 \times 3$  inches.

No. 4, EAR Loose.



$3 \times 2\frac{1}{2}$ ,  $4 \times 3$  inches.

No. 5, EAR Loose.



$3 \times 2\frac{1}{2}$ ,  $4 \times 3$  inches.

[BLANK PAGE]



CCA



No. 6 HEAD.




3 x 2½ and 4 x 3 inches.

No. 7 HEAD.



3, 3½, and 4 inches.

No. 8 EAR.

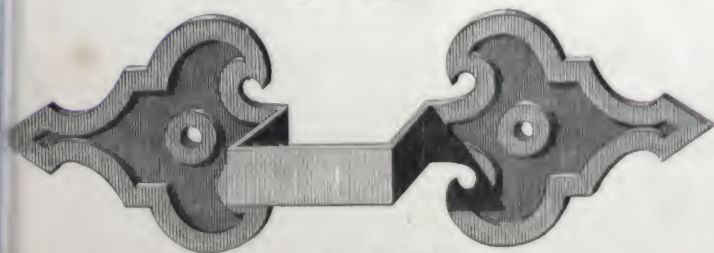

3 x 2½, 4 x 3, 5 x 3½ inches.

No. 9 EAR.



3, 3½, 4, 4½ inches.

[BLANK PAGE]



CCA



## GUTTERS.

24

GUTTERS, No. 3, Plain,—No. 4, with Plain Faucet,—No. 5, with Lions' Heads.



No. 6.



$4\frac{1}{2} \times 3\frac{1}{2}$ ,  $5 \times 4$ ,  $6\frac{1}{2} \times 4\frac{1}{2}$  inches.

No. 7.



$5 \times 4\frac{1}{2}$ ,  $8 \times 6$  inches.

No. 8.



$4 \times 2\frac{3}{4}$ ,  $6 \times 3\frac{1}{2}$  inches.

No. 9.



$6 \times 5$  inches.

[BLANK PAGE]



CCA



# GUTTERS.

25

No. 10.





$5 \times 5\frac{1}{2}$ ,  $5\frac{1}{2} \times 6$  inches.

No. 11.



$4\frac{1}{2} \times 3\frac{1}{2}$ ,  $6 \times 4\frac{1}{2}$ ,  $8 \times 5\frac{1}{2}$  inches.

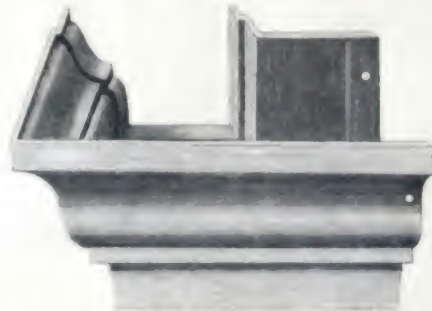

$4\frac{1}{2} \times 3\frac{1}{2}$ ,  $6 \times 4\frac{1}{2}$ ,  $3 \times 5\frac{1}{2}$  inches.

No. 12.



$13 \times 6$  inches.

We supply Angles and Return Stop-ends, right and left hand, for all our Gutters

[BLANK PAGE]



CCA





# ORNAMENTAL AND CENTRE GUTTERS.

26

No. 13.



20 x 6 x 5 inches at bottom.

No. 14.



12 x 5 x 4 inches at bottom.

No. 15.



5 1/2 x 4 and 7 x 5 inches.

No. 16.



4 x 4 and 5 x 5 inches.

## ORNAMENTAL BRACKETS.

*All sizes to order.*

No. 1.



No. 2.



No. 3.



No. 4.



[BLANK PAGE]



CCA



PLAIN RIDGING.


27

No. 1



ORNAMENTAL RIDGING.

No. 2

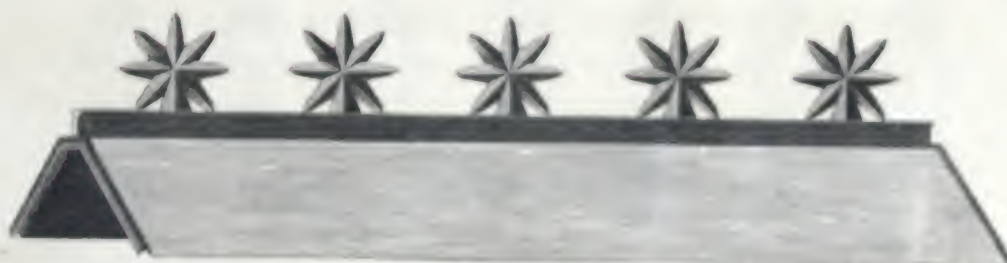

No. 3



[BLANK PAGE]




CCA




ORNAMENTAL RIDGING.

28


No. 4.

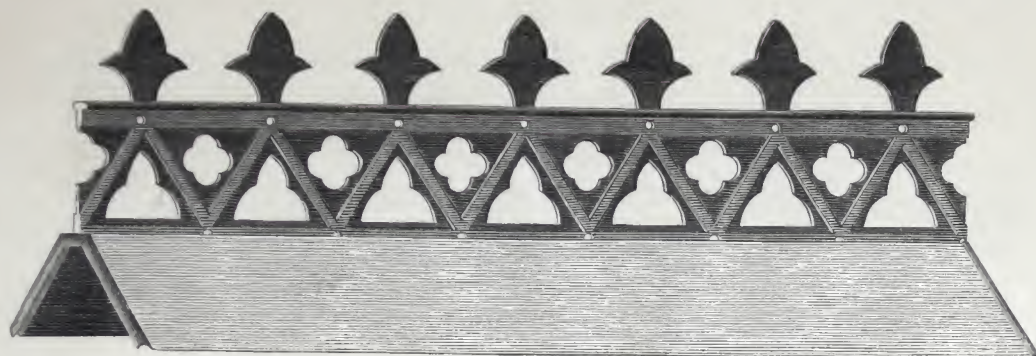

No. 5.

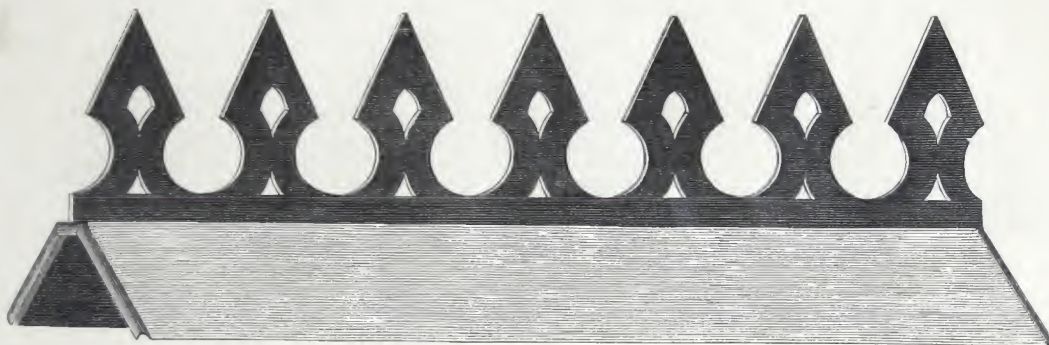

No. 6.

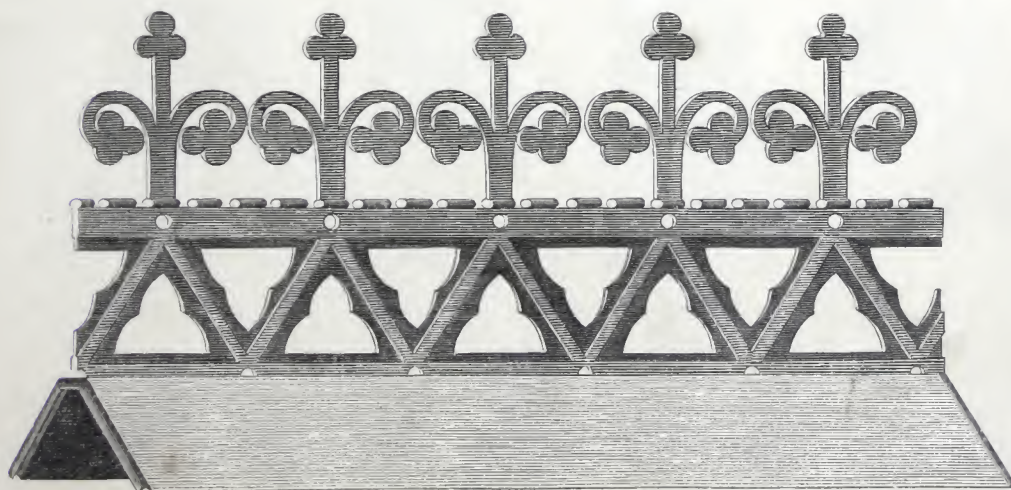

We supply Ridging for Roofs for  $\frac{1}{2}$ ,  $\frac{1}{3}$ , or  $\frac{1}{4}$  Pitch.

[BLANK PAGE]




CCA

The  
each front  
of ridge o  
of merely



No. 7.

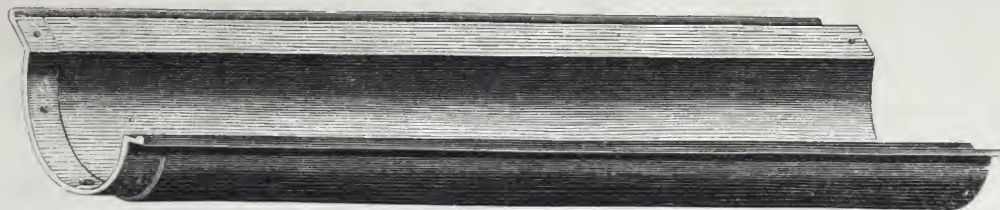


VENTILATING RIDGE, for DRYING STOVES, for PRINTFIELDS.


*Can also be used as Centre Gutters.*

16 × 7, 13 × 6, and 11 × 5 inches.

No. 8.

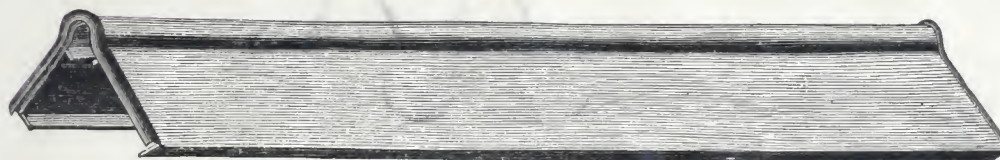

No. 9.

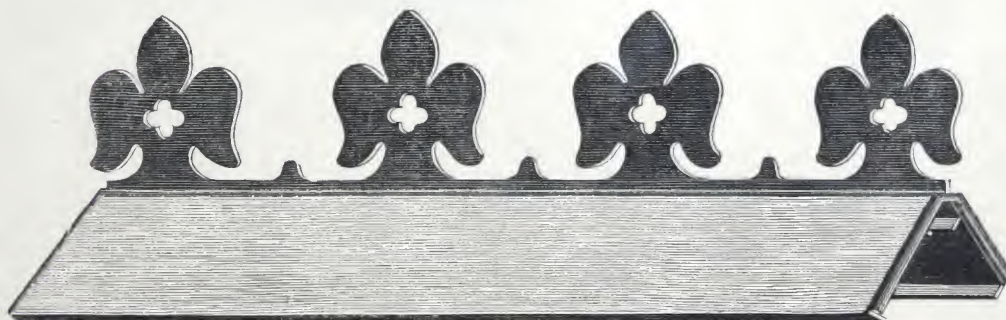

The above Ridges differ from the former patterns in having a fitting strip  $1\frac{1}{2}$  inch deep, as shown on drawing on each frontage. The advantages of the improvement are the certainty of the ridge fitting any pitch of roof, greater strength of ridge obtained, and a better appearance from the ground, a thickness of  $1\frac{1}{2}$  inch of metal being shown on edge, instead of merely the thickness of web. This improvement can be applied to all the other patterns.


[BLANK PAGE]



CCA



KITCHEN SINK or JAW BOX.

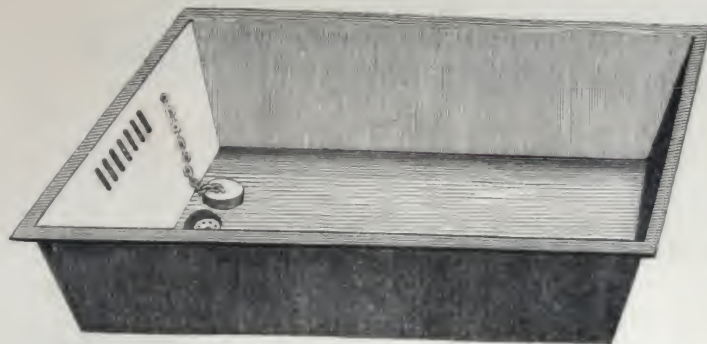


15, 18, 21, 24, 27, 30, 33, 36 inches.  
All Sizes to Order.

WATER CLOSET.



Nos. 1 and 2.

JAW BOX for Circular Staircases.

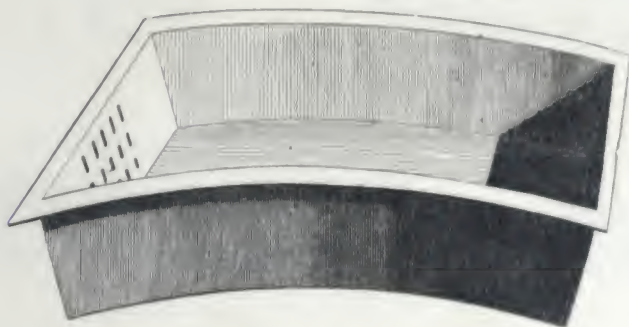


27 x 18 x 9½ inches.

SHIP WATER CLOSET.



Nos. 1 and 2.

SINK TRAPS.



3, 4, 5, 6, 7, 8, 9, 10, 11, 12 inches.

PLUMBER'S POT.



5, 6, 7, 8, 9, 10, 11, 12 inches.

PLUMBER'S CHAFFER PAN.




[BLANK PAGE]



CCA

CESSPOOL




1 to 4 1/2 inches

COVER



LEAD



16 and 18




No. 18, CATTLE TROUGH—Plain, and with Self-Acting Gearing.



Sizes from 3 to 12 ft. long; 2 x 20 x 14 in. deep. See PRICE LIST.

FORCE PUMP FRAME.

CESSPOOL BLOCK.



1 to 4½ inches diameter.

OBTUSE ELBOW BLOCK.




1 to 4½ inches diameter.

COVERS FOR LEAD BENDS.



10 to 30 in. long.

STOP-COCK PLUG.




LEAD BOILERS.




16 and 18 inches diameter.


STOP-COCK COVER, Hinged.



INGOTS.

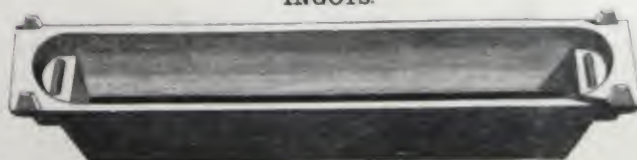

6 to 24 inches long.

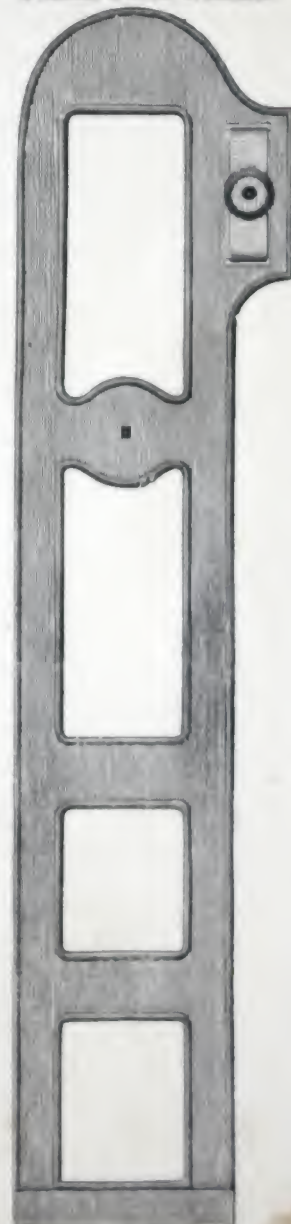

# BENCH AND DESK STAND

These Bench and Desk Standards are designed so as to combine a graceful and light appearance with great strength and receive the sword-piece with the check commonly required in the



No. 1.—BENCH STANDARD,  
with Book-board Folding Bracket.



No. 2.—BENCH STANDARD,  
with Book-board Bracket.



No. 3.—BENCH STANDARD,  
with Back Rail.



No. 4.—  
with Folding  
and B



No. 1.—CURVED DESK & BENCH STANDARD.  
26, 27½, and 29 inches.



No. 2.—CURVED DESK STANDARD.  
26, 27½, and 29 inches.



No. 3.—CURVED DESK STANDARD,  
with Folding Bracket.  
26, 27½, and 29 inches.



No. 4.—DESK  
26, 27½, and



# AND DESK STANDARDS.

and light appearance with great strength and durability. A very important improvement has been introduced in some of the  
 consisting of a socket to receive the sword-piece for strengthening the seat, without requiring it to be cut through, as is the case  
 piece, and the check consequently required in the latter insures steadiness.



No. 4.—STANDARD,  
with Folding Brackets for Bench  
and Book-board.



No. 5.—BENCH STANDARD,  
with Folding Seat Bracket and  
Back Rail.



No. 6.—BENCH STANDARD,  
with Folding Seat Bracket.



No. 7.—BENCH STANDARD.



No. 4.—DESK & BENCH STANDARD.  
26, 27½, and 29 inches.



No. 5.—DESK STANDARD.  
26, 27½, and 29 inches.



No. 6.—DESK STANDARD,  
with Flat Top.  
24 inches.



No. 7.—BENCH STANDARD.  
14, 15, and 16 inches.



Digitized by



ASSOCIATION  
PRESERVATION  
INTERNATIONAL

BUILDING  
TECHNOLOGY  
HERITAGE  
LIBRARY

[www.apli.org](http://www.apli.org)

From the

CCA

CANADIAN  
ARCHITECTURE  
CENTRE

[www.cca.ca](http://www.cca.ca)